


Band Pass Ceramic Filters(Array Type) 400Mhz~4Ghz

Dimension

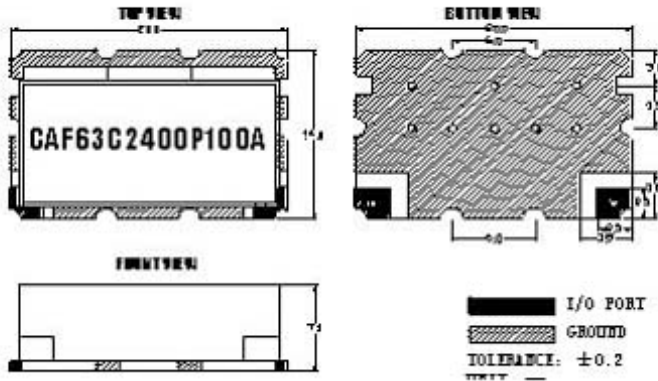

Feature

Custom designs High consistent Q Extremely Temperature stable, Low insertion loss

Typical Application:

Repeaters, base station, CDMA/GSM/PCS base station, Satellite transceivers, Wifi/Wimax base station, WLL, ISM, PCS, CATV, GPS Cellular systems, PCS systems, Remote metering, Global positioning.

Specification

Part No.	Center Frequency (MHz)	Number of Sections	Resonator type	Band Width (MHz)	Insertion Loss (dB) max.	Ripple in Band Width (dB)max.	V.S.W.R max	Attenuation (dB) min.(MHz)
CAF42C1500P01A	1500	2	4	±0.5	3.0	1.0	1.5	30.0(fo±100)
CAF33C675P40A	675	3	3	±20.0	2.5	0.8	1.4	30.0(fo±100)
CAF33C1500P10A	1500	3	3	±5.0	3.0	1.0	1.5	30.0(fo±100)
CAF33C1620P10A	1620	3	3	±5.0	3.0	1.0	1.5	30.0(fo±100)
CAF33C1880P10A	1880	3	3	±5.0	3.0	1.0	1.5	30.0(fo±100)
CAF33C1920P10A	1920	3	3	±5.0	3.0	1.0	1.5	30.0(fo±100)
CAF43C2593S25A	2593	3	4	±12.5	0.9	1.0	2.0	60.0(fo-147)
CAF43C3555P55A	3555	3	4	±27.5	3.0	1.7	3.0	25.0(fo±80)
CAF53C4000S100A	4000	3	5	±50.0	1.8	1.5	1.5	35.0(fo±250)
CAF63C2400P100A	2400	3	6	±50.0	1.5	1.0	2.0	20.0(fo±150)
CAF34C1000P10A	1000	4	3	±5.0	2.5	0.5	1.5	40.0(fo±200)
CAF34C1150S40A	1150	4	3	±20.0	3.5	0.1	2.0	15.0(fo±39)
CAF34C2593P214A	2593	4	3	±107.0	3.0	0.5	1.4	20.0(fo±236)
CAF34C3450P100A	3450	4	3	±50.0	2.2	1.0	1.7	20.0(fo±230)
CAF44C428P33A	428	4	4	±16.5	3.0	1.0	1.5	28.0(fo-48)
CAF45C3500P220A	3500	5	4	±110.0	3.0	0.5	1.4	20.0(fo±260)
CAF46C2437P50A	2437	6	4	±25.0	3.5	1.0	1.7	15.0(fo+47)
CAF56C1900P70A	1900	6	5	±35.0	3.0	1.0	2.0	80.0(fo±420)
CAF66C2250C100A	2250	6	6	±50.0	3.0	1.5	2.0	55.0(fo+140)
CAF38C880P160A	880	8	3	±80.0	3.0	1.0	2.0	30.0(fo-180)
CAF38C2000P400A	2000	8	3	±200.0	3.0	0.5	1.0	30.0(fo±300)

Custom requests are available, please send your requests to: info@accutemicro, we will reply promptly and help you with any questions you might have. (All info is subjected to change without notice, for further info, pls contact our sales engineers.)